

# HLG-240H series







#### **■** Features

- · Constant Voltage + Constant Current mode output
- Metal housing with class I design
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
   3 in 1 dimming
- Typical lifetime > 62000 hours
- 7 years warranty


## Applications

- LED street lighting
- · LED high-bay lighting
- · Parking space lighting
- · LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

### Description

HLG-240H series is a 240W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-240H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 93.5%, with the fanless design, the entire series is able to operate for -40  $^{\circ}$ C ~ +90  $^{\circ}$ C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-240H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

### **■** Model Encoding

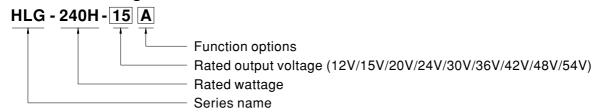

Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
С		Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.	By request
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request



# HLG-240H series

### **SPECIFICATION**


MODEL		HLG-240H-12	HLG-240H-15	HLG-240H-20	HLG-240H-24	HLG-240H-30	HLG-240H-36	HLG-240H-42	HLG-240H-48	HLG-240H-54
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
	CONSTANT CURRENT REGION Note.4	6 ~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V
	RATED CURRENT	16A	15A	12A	10A	8A	6.7A	5.72A	5A	4.45A
	RATED POWER	192W	225W	240W	240W	240W	241.2W	240.24W	240W	240.3W
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p
İ		Adjustable for	r A/C-Type onl	y (via built-in p	ootentiometer	)				
	VOLTAGE ADJ. RANGE	11.2 ~ 12.8V		, ,	22.4 ~ 25.6V	1	33.5 ~ 38.5V	39 ~ 45V	44.8 ~ 51.2V	50 ~ 57V
DUTPUT				y (via built-in p	ootentiometer	)				
	CURRENT ADJ. RANGE		7.5 ~ 15A	6 ~ 12A	5 ~ 10A	4 ~ 8A	3.3 ~ 6.7A	2.86 ~ 5.72A	2.5 ~ 5A	2.23 ~ 4.45A
	VOLTAGE TOLERANCE Note.3		±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
		1000ms,80ms		00ms,80ms/2						110,0
	HOLD UP TIME (Typ.)	15ms / 115VA								
	(')	90 ~ 305VAC	127 ~ 431	IVDC						
	VOLTAGE RANGE Note.5			ARACTERISTI	C" section)					
	FREQUENCY RANGE	47 ~ 63Hz								
	TREGOLITOTRATOL		\/AC DE>0.0	5/230VAC @ fu	ull load					
	POWER FACTOR (Typ.)			CTOR (PF) CH		C" cootion)				
		,		, ,		275% / 277VA	C)			
INPUT	TOTAL HARMONIC DISTORTION	```		RMONIC DIS			<b>(</b> )			
INFUI	EFFICIENCY (Typ.)	90%	90%	91.5%	· ·	92.5%	02.50/	92.5%	93%	02 50/
		4A / 115VAC	2A / 230V		92.5% 277VAC	92.5%	92.5%	92.5%	93%	93.5%
	AC CURRENT (Typ.)					230VAC; Per NE	IMA 410			
	INRUSH CURRENT (Typ.)  MAX. No. of PSUs on 16A CIRCUIT BREAKER				. ,	of type C) at 2				
		<0.75mA / 277	7) // C		<u> </u>					
	LEAKAGE CURRENT		/ VAC							
	OVER CURRENT	95 ~ 108%  Constant current limiting, recovers automatically after fault condition is removed								
							emoved			
PROTECTION	SHORT CIRCUIT			matically after	1		10 101	40 541	oou	00 0714
	OVER VOLTAGE	13.5 ~ 18V		23.5 ~ 27.5V	1	33 ~ 39V	43 ~ 49V	48 ~ 54V	55 ~ 63V	60 ~ 67V
			•	oltage, re-pow						
	OVER TEMPERATURE					nperature goes				
	WORKING TEMP.		•	e refer to "OU	IPUT LOAD VS	TEMPERATU	IRE" section)			
	MAX. CASE TEMP.	Tcase= +90°C								
ENVIRONMENT	WORKING HUMIDITY		non-condensir	ig .						
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, ′								
	TEMP. COEFFICIENT	±0.03%/°C (								
	VIBRATION					ong X, Y, Z axe				
		· ·			( ) !	,,	,		, EN61347-2-1	
	SAFETY STANDARDS	(except for HLG-240H C type); UL60950-1, UL8750, TUV EN60950-1; GB19510.1, GB19510.14; IP65 or IP67; J61347-1, J61347-2-13 approved								
SAFETY&	WITHSTAND VOLTAGE			proved G:2KVAC O/	D EC:1 EV./A	C				
EMC	ISOLATION RESISTANCE			00M Ohms / 50			loco C (@ local	>500/\.ENG	1000 3 3 004	7749
	EMC EMISSION	and GB1762		100032 (CISPR	(32) Class B, E	:N01000-3-2 C	iass C (@ ioad	≤50%); EN0	1000-3-3,GB1	7743
	EMC IMMUNITY			2,3,4,5,6,8,11. I	EN61547, EN5	5024, light indu	ıstry level (sur	ge immunity Lir	ne-Earth 4KV, L	ine-Line 2KV
	MTBF	207.9K hrs mi		K-217F (25°C)		, <b>.</b>	, (	,,		
OTHERS	DIMENSION			HLG-240H-Bla		51*68*38.8mm	(L*W*H)(HLG	-240H C-Type)		
	PACKING		, ,,	JFT(HLG-240-			cs/15.8Kg/1.16			
	All parameters NOT special							•	71.7	
	'	•							pacitor.	
NOTE	2. Ripple & noise are measure	3. Tolerance : includes set up tolerance, line regulation and load regulation.								
NOTE	· · ·	tolerance, line	. ogalalloll alle	4. Please refer to "DRIVING METHODS OF LED MODULE".						
NOTE	3. Tolerance : includes set up		-	≣".						
NOTE	3. Tolerance : includes set up 4. Please refer to "DRIVING M 5. De-rating may be needed up	METHODS OF Inder low input	LED MODULI voltages. Plea	se refer to "ST						
NOTE	3. Tolerance : includes set up 4. Please refer to "DRIVING N 5. De-rating may be needed u 6. Length of set up time is me	METHODS OF under low input asured at first o	LED MODULI voltages. Plea cold start. Turr	se refer to "ST ning ON/OFF t	he driver may	lead to increas	se of the set up	o time.		
NOTE	Tolerance : includes set up     Please refer to "DRIVING M     De-rating may be needed u     Length of set up time is me     The driver is considered as	METHODS OF ander low input asured at first of a component t	LED MODULI voltages. Plea cold start. Turr that will be ope	se refer to "ST ning ON/OFF terated in comb	he driver may oination with fir	lead to increas al equipment.	se of the set up Since EMC pe	o time. erformance will	be affected by	/ the
NOTE	Tolerance : includes set up     Please refer to "DRIVING M     De-rating may be needed u     Length of set up time is me     The driver is considered as complete installation, the fin	METHODS OF under low input leasured at first of a component to a component nual equipment n	LED MODULI voltages. Plea cold start. Turr that will be open nanufacturers	se refer to "ST ning ON/OFF t erated in comb must re-qualify	he driver may ination with fir / EMC Directiv	lead to increasinal equipment. The on the comp	se of the set up Since EMC pe olete installation	o time. erformance will n again.		/ the
NOTE	Tolerance : includes set up     Please refer to "DRIVING M     De-rating may be needed u     Length of set up time is me     The driver is considered as complete installation, the fin     To fulfill requirements of the	METHODS OF under low input leasured at first of a component to a component nual equipment n	LED MODULI voltages. Plea cold start. Turr that will be open nanufacturers	se refer to "ST ning ON/OFF t erated in comb must re-qualify	he driver may ination with fir / EMC Directiv	lead to increasinal equipment. The on the comp	se of the set up Since EMC pe olete installation	o time. erformance will n again.		/ the
NOTE	Tolerance : includes set up     Please refer to "DRIVING M     De-rating may be needed u     Length of set up time is me     The driver is considered as complete installation, the fin	METHODS OF inder low input inasured at first of a component that equipment not also also also also also also also also	LED MODULt voltages. Plea cold start. Turr that will be open nanufacturers ulation for ligh	ise refer to "ST ning ON/OFF the erated in comb must re-qualify ting fixtures, th	he driver may vination with fir r EMC Directiv vis LED driver	lead to increasing equipment.  Ye on the compount only be us	se of the set up Since EMC peolete installation ed behind a su	o time. erformance will n again. witch without p	permanently	



# HLG-240H series


### **■** BLOCK DIAGRAM

Fosc: 100KHz

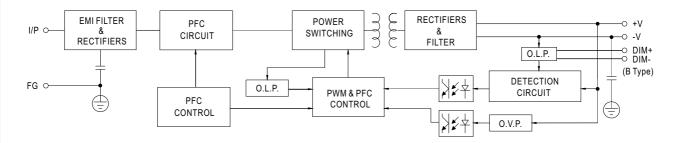

#### ■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

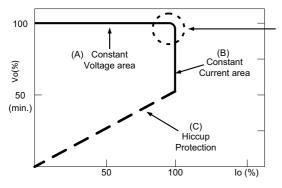

Typical output current normalized by rated current (%)


In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




# HLG-240H series

### ■ DIMMING OPERATION

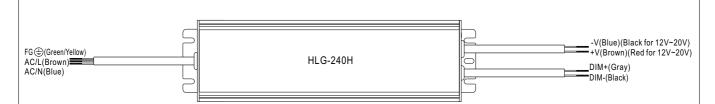


#### **※** 3 in 1 dimming function (for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
  - $1 \sim 10 \text{VDC}$ , or 10 V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100μA (typ.)
- O Applying additive 1 ~ 10VDC

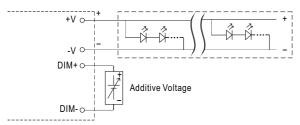


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

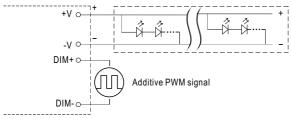



"DO NOT connect "DIM- to -V"


Applying additive resistance:

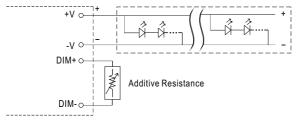

"DO NOT connect "DIM- to -V"











# HLG-240H series

Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

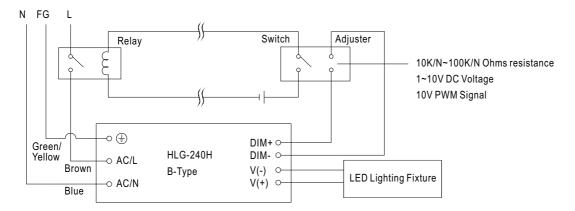


Using a switch and relay can turn ON/OFF the lighting fixture.



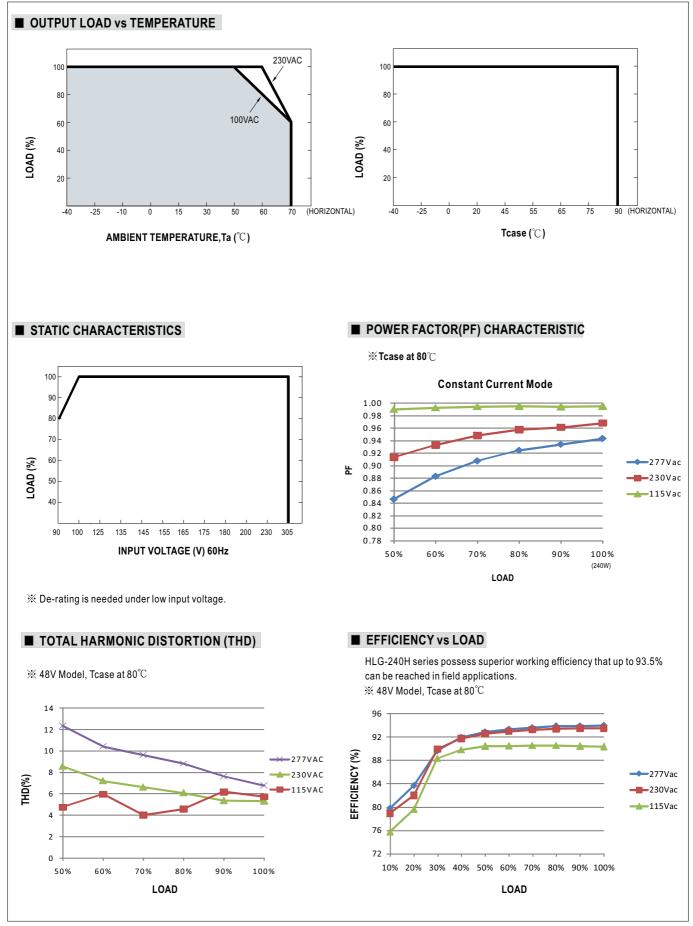







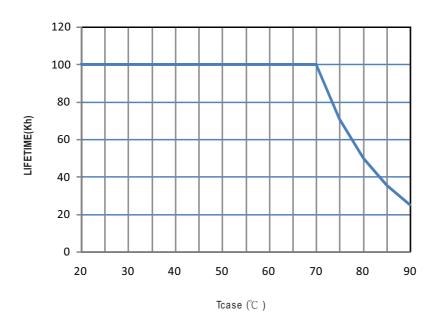



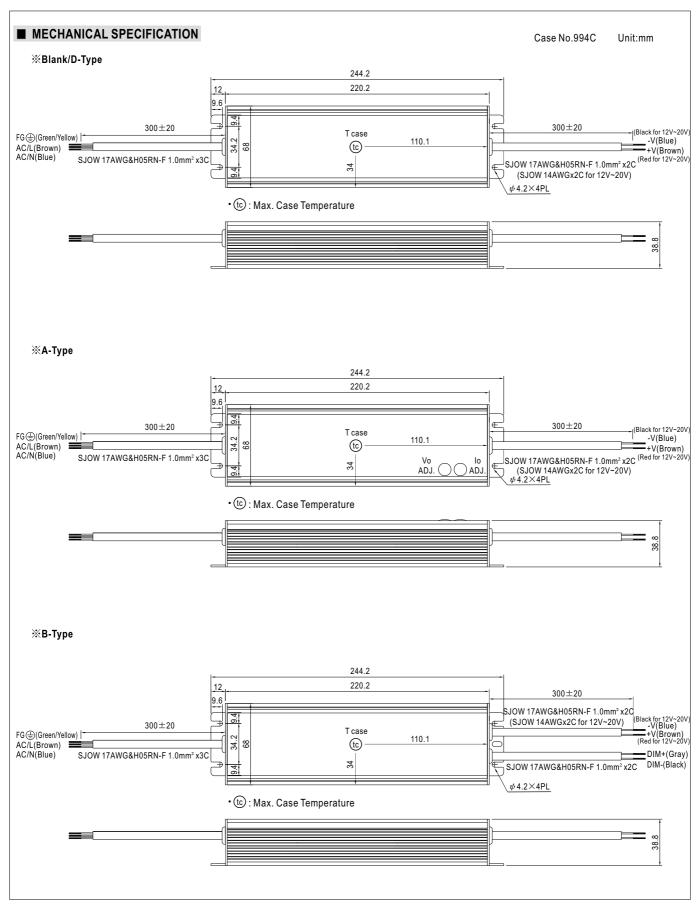



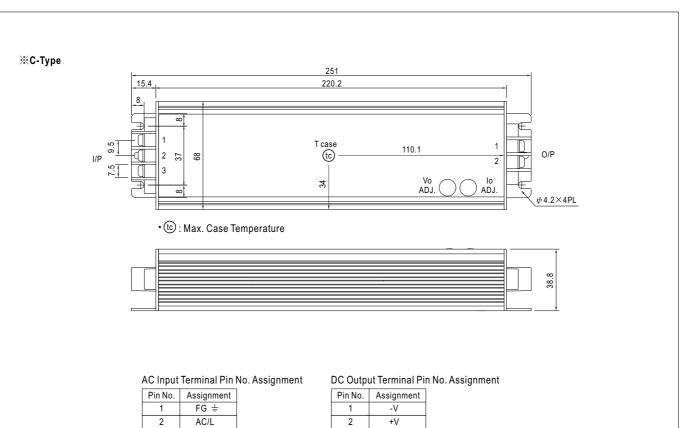

Pin No.	Assignment
1	FG ±
2	AC/L
3	AC/N




# HLG-240H series

### ■ WATERPROOF CONNECTION


#### Waterproof connector

 $Water proof connector can be assembled on the output cable of HLG-240H \ to operate in \ dry/wet/damp \ or \ outdoor \ environment.$ 




Size	Pin Configuration (Female)			
M12	00	000		
IVIIZ	4-PIN	5-PIN		
	5A/PIN	5A/PIN		
Order No.	M12-04	M12-05		
Suitable Current	10A max.	10A max.		

Size	Pin Configuration (Female)		
M15	00		
IVITO	2-PIN		
	12A/PIN		
Order No.	M15-02		
Suitable Current	12A max.		




#### **X** Cable Joiner

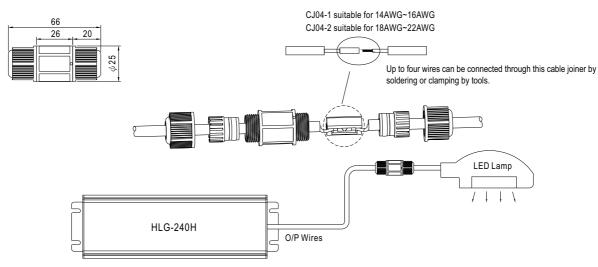

CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

#### **※** Junction Box Option

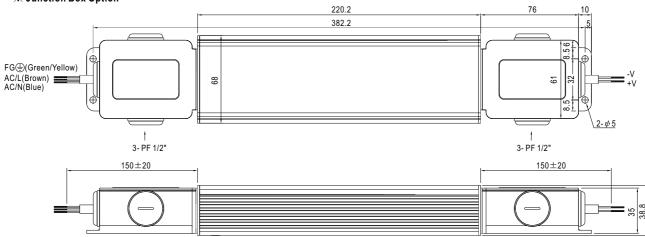

 $\\ \bigcirc \ \, \text{Junction box option is available for A/Blank-Type. Please contact MEAW WELL for details.}$ 

### ■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html